


# UHF Cards

## XRF

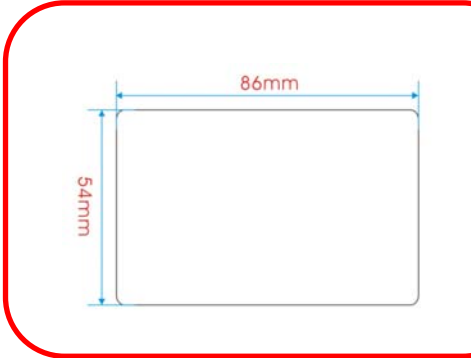

- **Affordable:** very well priced when compared to other brands
- **Flexible:** Wiegand, compatible with all Impro IXP and Portal systems
- **Supported door controllers:** TRT, iTRT, AP Wiegand door module

## Specifications

### XRF

Product Information	
Tag type	UHF RFID
Part number	XRF951
Description	ISO format
Material	Both sides printable, PVC, water and dust proof, 86x54x0.8mm
Environmental Specifications	
Use	Personal use, tag damaged if tampered with
Expected lifetime	Read/write life expectancy of 100.000 times
Operating temperature	-20°C to +80°C
Storage temperature	-20°C to +80°C
Protocol	
Protocol	EPC global C1 Gen2 / ISO 18000-6C
Frequency	860 – 960MHz
Read speed	< 1s
Memory	
Configuration	EPC 96 bits; Unique TID 48 bits; User memory 512 bits
Max. reading distance	15 meters