


UHF Windshield Tag

XRF

- **Affordable:** very well priced when compared to other brands
- **Flexible:** Wiegand, compatible with all Impro IXP and Portal systems
- **Supported door controllers:** TRT, iTRT, AP Wiegand door module

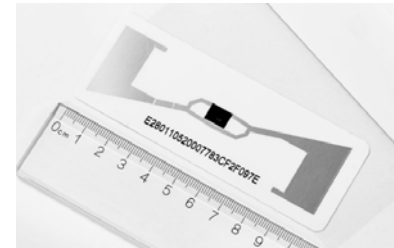

Specifications

XRF

Product Information	
Tag type	UHF RFID windshield tag
Part number	XRF952
Description	Self adhesive 3M label
Material	PET, 99x12mm
Environmental Specifications	
Use	IP65, anti-tamper, UV protected
Protection	Dust & water proof, tag damaged & deactivated if tamper
Expected lifetime	Read/write life expectancy of 100.000 times
Operating temperature	-25°C to +75°C
Storage temperature	-25°C to +75°C
Protocol	
Protocol	EPC global C1 Gen2 / ISO 18000-6C
Frequency	860 – 960MHz
Read speed	< 1s
Memory	
Configuration	EPC 128 bits; Unique TID 96 bits; User memory 512 bits
Max. reading distance	15 meters
Data	
Data hold	More than 10 years, read/write more than 100.000 times
Data protection	Password modify, lock, kill
Various	Non-transferable